

Dr's Light 2














Multi-Purpose Dental Light

Master of Dental Light




Master of Dental Light

1 Features of Drs Light2

-  **Dual wavelength LED**
Can polymerize for any kinds of material with dual wavelength (peak 405 & 460 nm)
-  **Wide irradiate area**
Can polymerize for wider area with 11 mm diameter.
-  **Various curing mode**
Power (Ortho mode included), Turbo, High, Low, Softstart, Pulse modes
-  **Adjustable angle**
Transformable straight, hybrid, and gun shapes.
-  **Focused light**
Focused LED light increase its performance.
-  **Big capacity & Interchangeable battery**
Applied big Samsung battery cell for long using time and life.
-  **Auto on/off**
Grip the device and the device is turn on.
-  **280° twistable head**
Can approach any where in oral cavity.
-  **Color OLED screen**
Show device states on clear OLED screen.
-  **Soft lens**
Easy to interchangeable if it get dirty or damage.
-  **Slim head (15mm)**
Easy to approach anywhere in oral cavity.
-  **Various accessories**
Various purpose head available. FL, Trans, WA head.
-  **Timer mode**
Device can be use as timer.

2 Program modes

Six curing programs are available in this device.

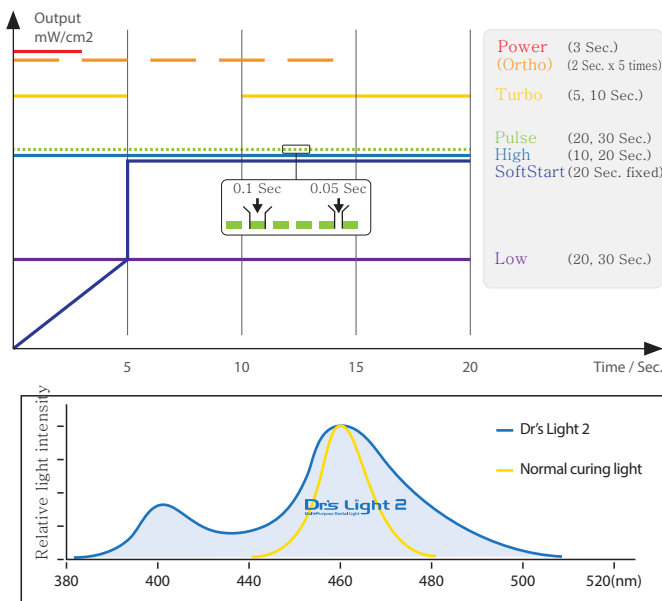

3 Various accessories [Option]



FL head (Fluorescence)

Finding early carious, plaque, and etc.



Trans head (Trans Illumination)


Finding crack, proximal carious, and etc.



WA head (Wide Angle)

Whitening accelerator, wide surface orthodontic bracket bonding, and etc.

4 WA Kit [Option]

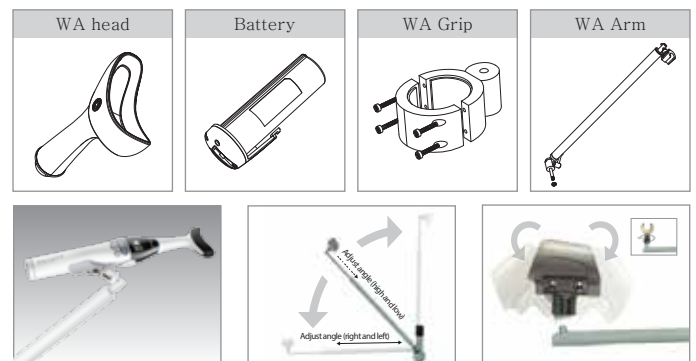

5 Specification

Handpiece (included curing light head)	Operation voltage	3.7V
	Peak wavelength	405nm & 460nm
	Measurement	Approx. 273 x 45 x 39 mm
	Weight	Approx. 114 g
Charger	Operation voltage	5V
	Measurement	Approx. 169 x 148 x 89 mm
	Weight	Approx. 170 g
Battery	Type	Lithium Ion battery
	Nominal voltage	DC 3.7V
	Measurement	Approx. 80 x 27 x 30mm
	Weight	Approx. 56g
Disposable cover	Quantity	Approx. 100 pcs by weight x 2ea
	Raw material	Polyethylene
Adapter	Input voltage	AC 100 ~ 240 V
	Output voltage	DC 5V 2A
	UL number	E333054